


Key Features

- 4Kp60 output
- 4:2:0, 4:2:2, 4:4:4 Color Subsampling, 8 and 10 Bit Color Depth
- Programmatic Advertising
- Multichannel audio support
- NDI support
- Airplay Support
- easily manageable, powerful Content Management (cloud or local)
- API for external content playback control and external device control
- Optimized Linux OS
- Extended operating temperature
- Wall mount (optional)
- Remote control for playlist triggering (optional)

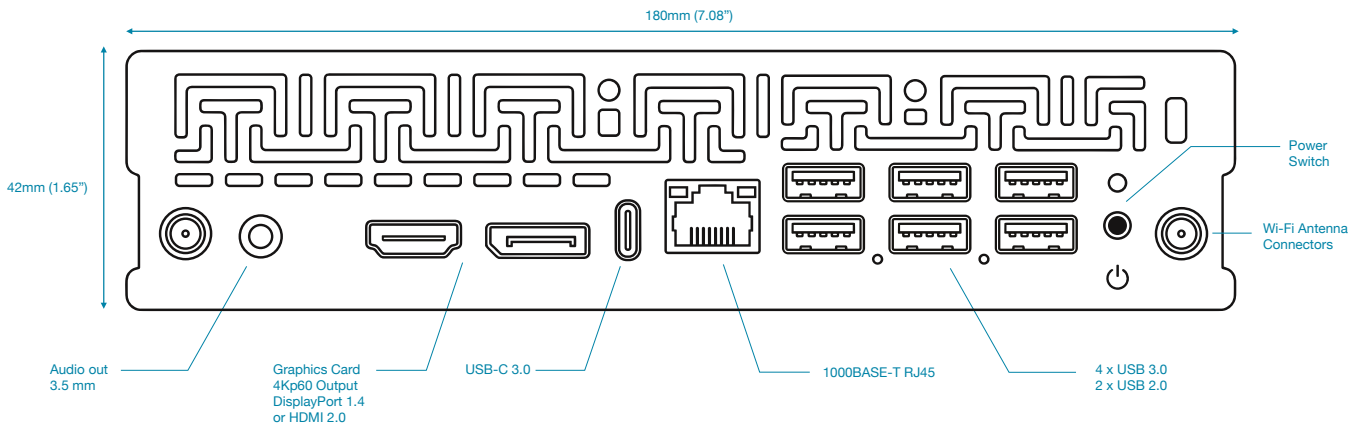

Tech Specs

Physical

Dimensions	Length: 195mm (7.67") Width: 180mm (7.08") Height: 42mm (1.65")
Weight	1300g (46 ounces)
Operating Temperature	-10 to 50 °C (14 to 122 °F)
Power Supply	External 95 W international switching power supply (DC-IN 19V 5A)

Hard- & Software / System

CPU	Core i7 2.1GHz 12 cores 16 threads
RAM	DDR4-16G
Storage	250 GB NVMe SSD (M.2 2280)
OS	Optimized Linux OS
Software	Preloaded, licensed and configured with Player Gold 1 Software Exclusively designed to communicate with Creator and ~sedna Cloud

Connectivity

Outputs	4Kp60 DisplayPort 1.4 or HDMI 2.0
Network	1x10/100/1000Mbps (RJ45); Wi-Fi 5/Wi-Fi 6, standard 2.4GHz
USB	4 USB 3.0 ports and 2 USB 2.0 ports
Audio	3.5 mm headphone jack; HDMI port supports multichannel audio output

Color Space & Bit Depth

Color format	RGB, Y'CbCr 4:4:4, Y'CbCr 4:2:2, Y'CbCr 4:2:0 (>=DP 1.3)
Color space	ITU-R BT.601, ITU-R BT.709, sRGB (>=DP 1.2), ITU-R BT.2020 (>=DP 1.3)
Bit depths (BPC)	8, 10

Supported Media



Video Containers	AVI, DV, FLV, M2S, M2T, M2V, M4V, MOD, MOV, MP4, MPEG, MPG, MPG, PS, TS, VOB, WMV
Video Codecs	DVVIDEO, H.264, H.265, MJPEG, MPEG1VIDEO, MPEG2VIDEO, MPEG4, WMV2 PRORES 422 LT, PRORES 422, PRORES 422 HQ, PRORES 4444
Audio Containers	AIF, AIFF, CAF, M4A, MP3, WAV
Audio Codecs	AAC, MP3, PCM_F64BE, PCM_S16LE, PCM_S16LE
Images	BMP, GIF, JPG, PNG, TGA, TIF
HTML	HTML, HTML5, WEBGL, transparent HTML
External Sources	NDI, Airplay, Capturing, Programmatic Advertising, Watched Folder

Options*

Main Memory Expansion	32 GB, 64 GB
Data Storage Expansion	1 TB, 2 TB, 4 TB
Failsafe Software	Automatic failover for redundant setups including notification services

Interactivity & Control

Interactivity	Single-Touch, Multitouch, Sensor Systems (additional hardware required)
External Control	~sedna Player API, ~sedna Advanced Player API, Network Socket Commands, HTTP requests
Control Interoperability	bidirectional communication with common Media control systems (e.g. Q-SYS, Crestron, AMX etc.)

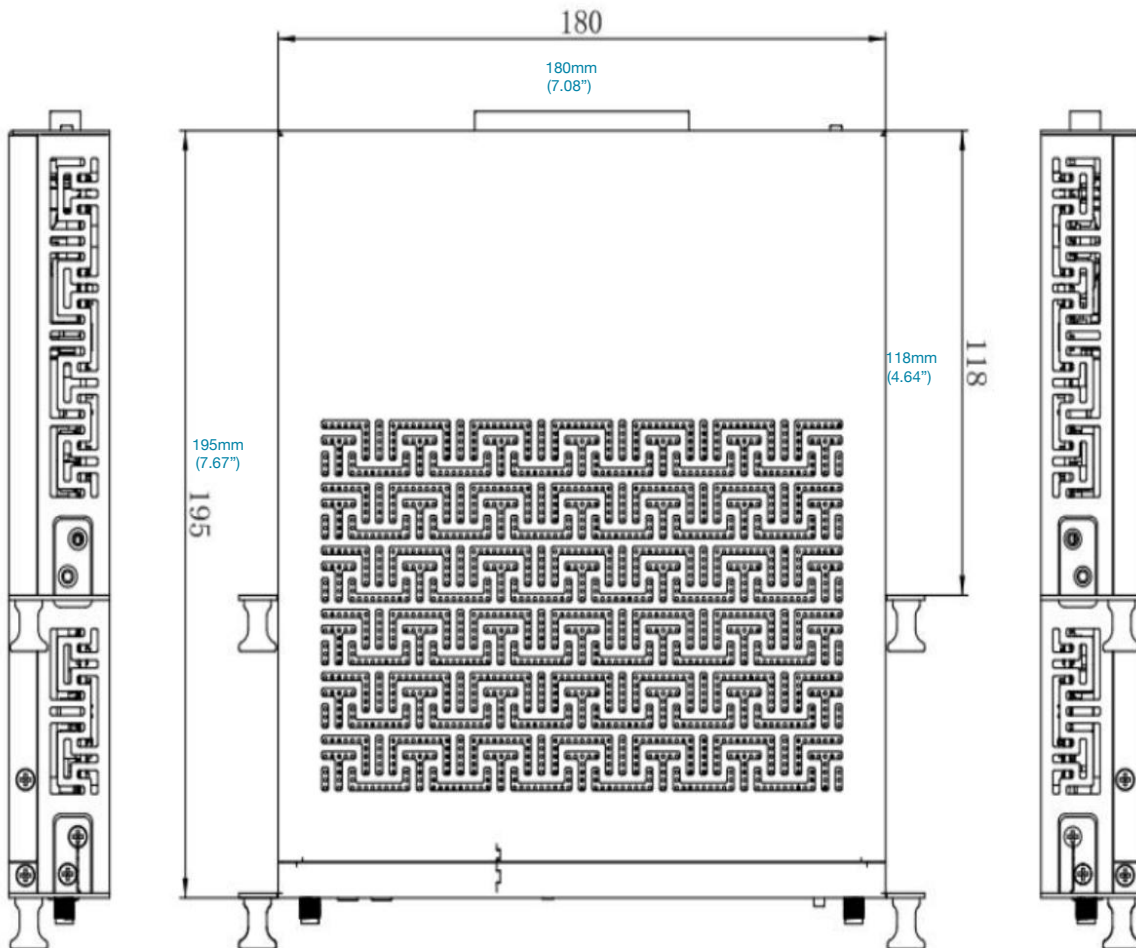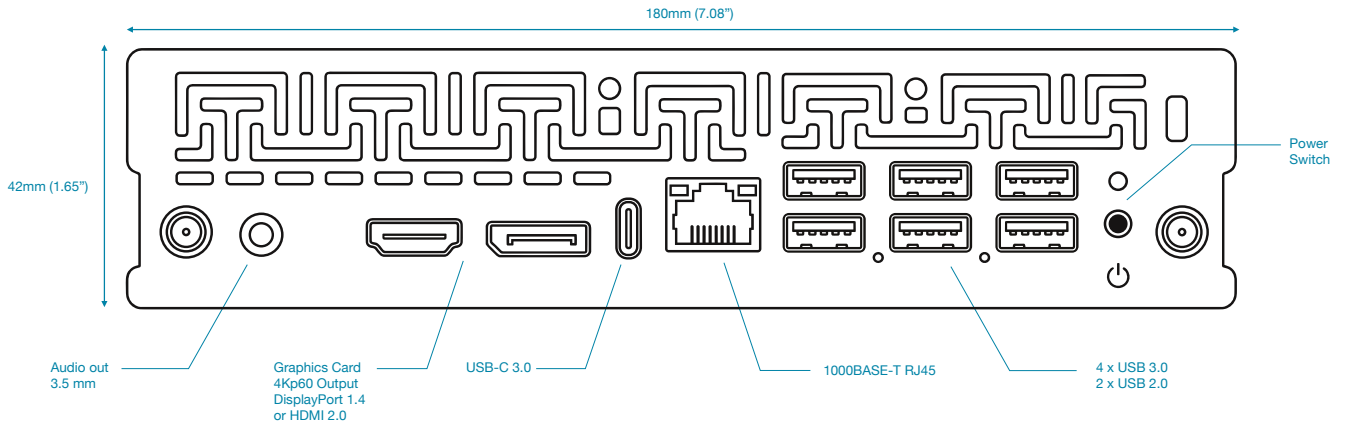

Physical

Dimensions	Length: 195mm (7.67") Width: 180mm (7.08") Height: 42mm (1.65")
Weight	1300g (46 ounces)
Operating Temperature	-10 to 50 °C (14 to 122 °F)
Power Supply	External 95 W international switching power supply (DC-IN 19V 5A)